


PRODUCT TECHNICAL DATASHEET: M90/F2ESO



Code	Description	Pcs/pallet
M90/F2ESO	Pair of synchronized photocells series M90 adjustable version.	


Product technical specifications	M90/F2ESO
Standard power	12/24V AC 50Hz - 12/24V DC
Absorption	TX=19mA, RX=20mA
Operating temperature	-20+55°C
Protection level	IP55
Maximum distance in open field	10 - 15 m
Maximum number of photocells synchronized	2
Orientation angle	210 ° horizontal - 15 ° vertical
Relay contacts max current	0,5A RX
Relay contacts max voltage	30V
Installation Type	External
Maximum dimension product in mm (L x W x H)	130 x 45 x 40
Product weight packed (Kg)	0,3

PRODUCT DIMENSIONS

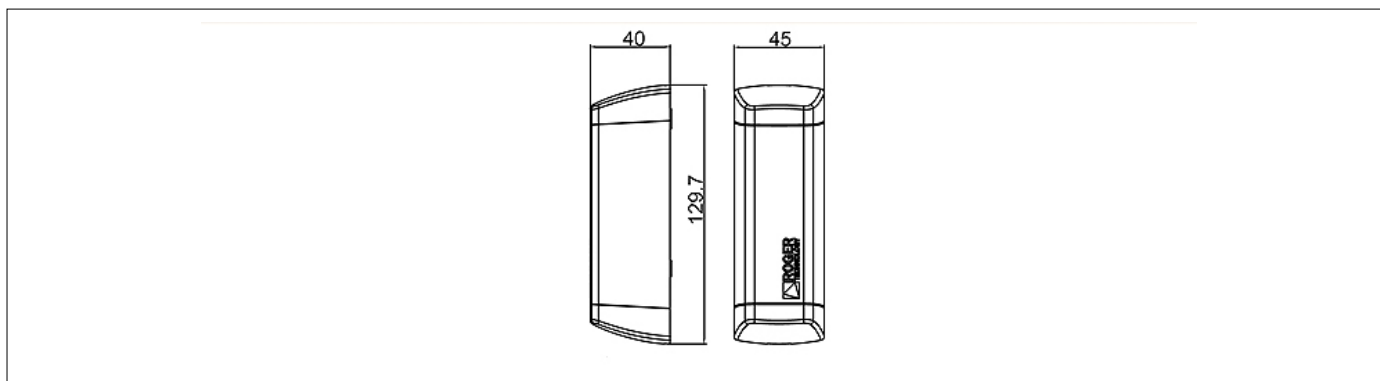

DIMENSIONS

PRODUCT PREPARING FOR INSTALLATION

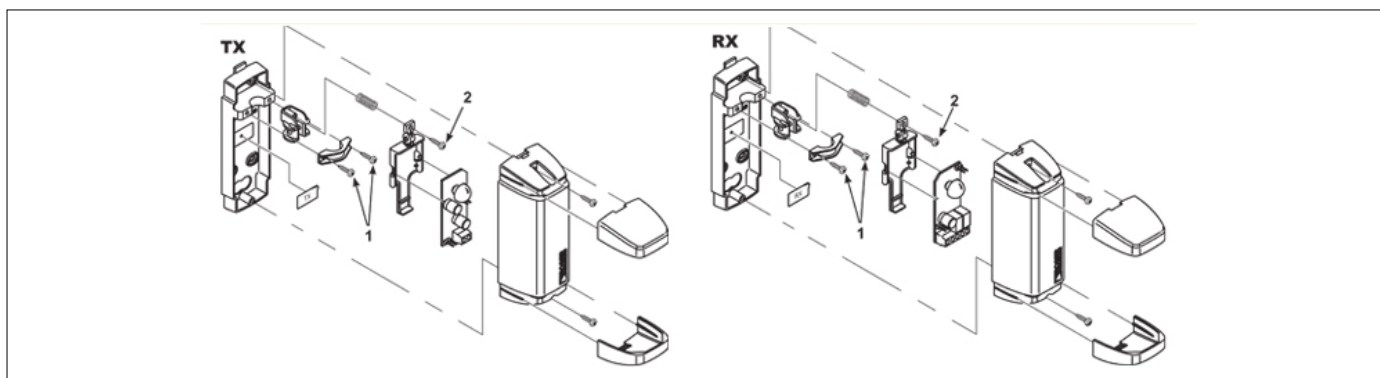

PREDISPOSITION FOR STANDARD INSTALLATION

PRODUCT ACCESSORIES



DEF/01

Pair of anti-vandal
protection shells for
adjustable
photocells
M90/F2ESO –
M90/F4ESO.