


## DS-3E Series Unmanaged PoE Switch

### Features and Functions

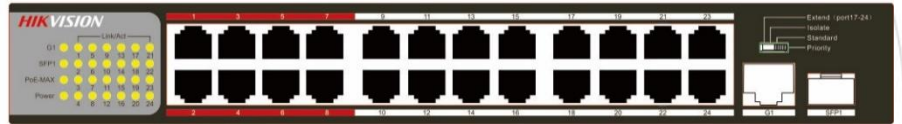

#### DS-3E0108P-E

- Complies with IEEE 802.3, IEEE 802.3u, IEEE 802.3x, IEEE 802.3af, and IEEE 802.3at standard
- 8 auto-negotiation RJ45 ports
- Auto MDI/MDIX
- Ports 1 - 4 of the switch support IEEE802.3at/af standard
- 1.6 Gbps backplane bandwidth and 1.19 Mbps packet forwarding rate for non-blocking line-speed forwarding
- Up to 30W PoE power for each PoE port
- Automatically adjust the power supply powered devices
- Durable case and silent, fan-less design, longer service life

#### DS-3E0109P-E/M

- 9\*10/100 Base-TX Ethernet ports
- Supports standard and EXTEND network mode
- Compliant with IEEE802.3, IEEE802.3u, IEEE802.3ab Ethernet standards
- Store-and-Forward switching
- 4K MAC address table and MAC address learning
- 1.8 Gbps backplane bandwidth
- All-metal construction
- Desktop and wall-mounted installation

#### DS-3E0318P-E/M & DS-3E0326P-E/M

- Compliant with IEEE802.3, IEEE802.3u, IEEE802.3ab, IEEE 802.3z, IEEE 802.1Q, and IEEE802.3x Ethernet standards
- 16/24\*10/100 Base-TX Ethernet ports, one 10/100/1000 Base-T Ethernet port and one 10/100/1000 Base-X SFP optical module port
- Ports 1 - 16/24 are 10/100 Mbps downlink ports and comply with IEEE 802.3af and IEEE 802.3at.
- The maximum of 30W port output PoE power and the maximum of 135W/225W total output PoE power
- Support four network modes: Priority, Standard, Isolate and Extend
- 4K MAC address and MAC address learning
- 7.2 Gbps/8.8 Gbps backplane bandwidth
- Store-and-Forward switching
- All-metal construction
- 13 inch length and 1 U standard height size allow it to be mounted on subrack.





## Specifications


Model		DS-3E0108P-E	DS-3E0109P-E/M	DS-3E0318P-E/M	DS-3E0326P-E/M	
Port	10/100 Mbps RJ45	8	9	16	24	
	10/100/1000 Mbps RJ45	/	/	1		
	1000 Mbps SFP	/	/	1 independent		
	High-priority Port	/	Port 1 - 2	Port 1 - 8		
	Lightning-proof Ranking	/	4 kV			
	Working Mode	/	EXTEND OFF, EXTEND ON	Extend (Port9-16), Priority, Standard, Isolate	Extend (Port17-24), Priority, Standard, Isolate	
Performance	Store-and-forward	Supported				
	MAC Address Table	1 k	4 k			
	MAC Learning	Auto-learning/ Auto-aging				
	Switching Capacity	1.6 Gbps	1.8 Gbps	7.2 Gbps	8.8 Gbps	
PoE Power	PoE standard	IEEE 802.3af, IEEE802.3at				
	PoE Powering Mode	Two pair of wires: pins 1 and 2, and pins 3 and 6	Supports 8-pin power supply			
	PoE Port	1 - 4	1 - 8	1 - 16	1 - 24	
	Maximum Output Port	30 W				
	Maximum Output Total	58 W		135 W	225 W	
Power Input		51 V DC, 1.25 A		100~240 V AC, 50/60 Hz		
Power Consumption		≤63w	≤63w	≤150w	≤250w	
Environment	Operating Environment	Operating Temperature: 0 °C ~ 40 °C Operating Humidity: 10% - 90% RH non-condensing				
	Storage Environment	Storage Temperature: -40 °C ~ 70 °C Storage Humidity: 5% - 90% RH non-condensing				
Transmission Speed		Ethernet: 10 Mbps (Half Duplex) / 20 Mbps (Full Duplex) Fast Ethernet: 100 Mbps (Half Duplex) / 200 Mbps (Full Duplex)		Ethernet: 10 Mbps (Half Duplex) / 20 Mbps (Full Duplex) Fast Ethernet: 100 Mbps (Half Duplex) / 200 Mbps (Full Duplex) Gigabit Ethernet: 2000 Mbps (Full Duplex)		
Transmission Medium		Ethernet: Cat 3 or better UTP/STP Fast Ethernet: Cat 5 or better UTP/STP		Ethernet: Cat 3 or better UTP/STP Fast Ethernet: Cat 5 or better UTP/STP Gigabit Ethernet: Cat 5 or better UTP/STP 1000 Base-SX: MMF (Multimode optical fiber) 1000 Base-LX: MMF (Multimode optical fiber) or SMF (Single Mode Fiber)		
Network Standard		IEEE 802.3, IEEE 802.3u, IEEE 802.3af, IEEE802.3at, IEEE 802.3x		IEEE 802.3, IEEE 802.3u, IEEE 802.3ab, IEEE 802.3af, IEEE 802.3at, IEEE 802.3x, IEEE 802.3z		

## Appearance

### Front Panel

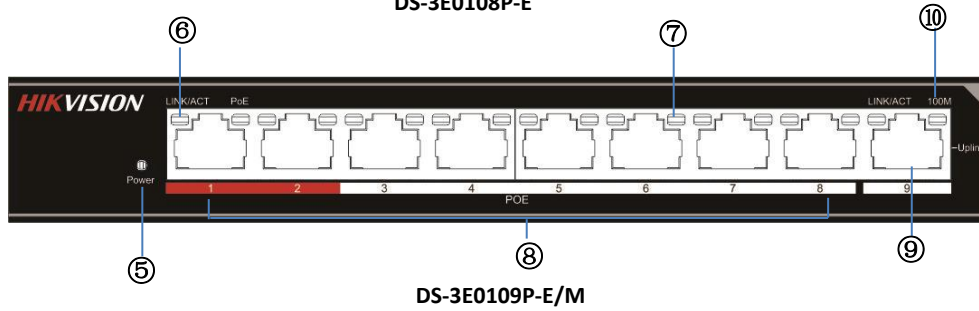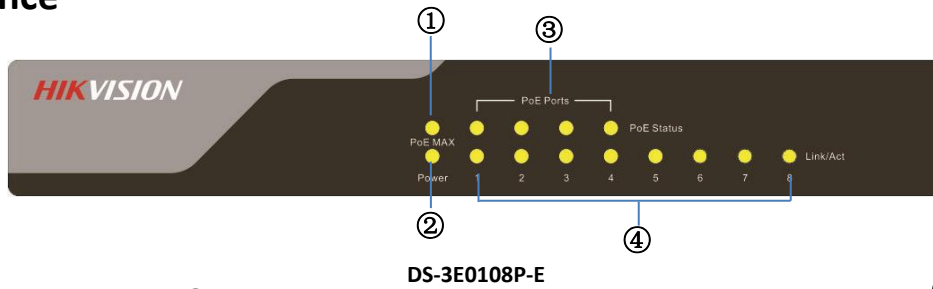


Index	Description	Index	Description
1	PoE MAX LED	2	Power LED
3	PoE Status LED	4	Link/Act LED
5	Power LED	6	Link/Act LED
7	PoE LED	8	Downlink RJ45 Ports
9	Uplink RJ45 Port	10	100 M LED

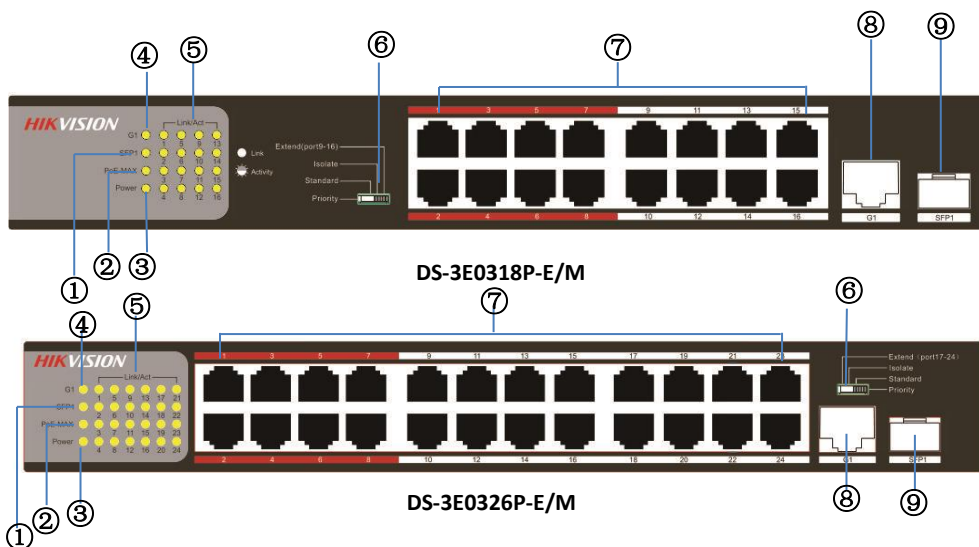


Index	Description	Index	Description
1	SFP1 LED	2	PoE-MAX LED
3	Power LED	4	G1 LED
5	Link/Act LED	6	Network Mode Switch
7	100 Mbps Downlink RJ45 Ports	8	1000 Mbps Uplink RJ45 Port
9	1000 Mbps Uplink SFP Port		

## Rear Panel

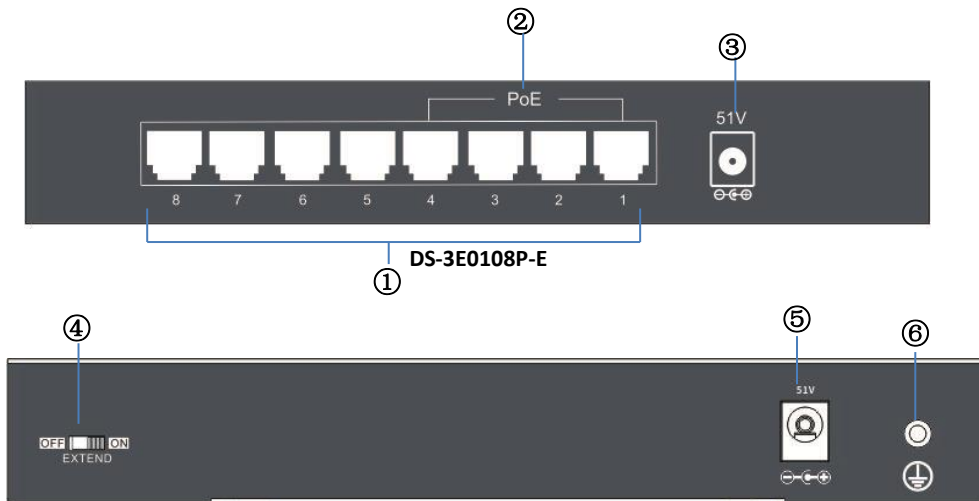

DS-3E0109P-E/M

Index	Description	Index	Description
1	RJ45 Ports	2	PoE Ports
3	Power Jack	4	EXTEND Mode Switch
5	Power Jack	6	Grounding Terminal

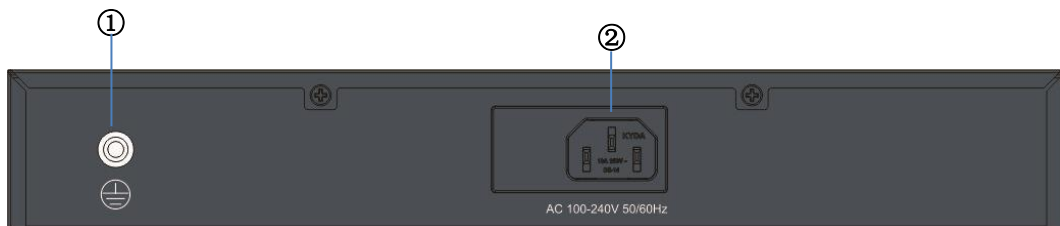

DS-3E0318P-E/M & DS-3E0326P-E/M

Index	Description	Index	Description
1	Grounding Terminal	2	Power Jack

Distributed by



### Headquarters

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
overseasbusiness@hikvision.com

**Hikvision USA**  
T +1-909-895-0400  
sales.usa@hikvision.com

**Hikvision Italy**  
T +39-0438-6902  
info.it@hikvision.com

**Hikvision Singapore**  
T +65-6684-4718  
sg@hikvision.com

**Hikvision Europe**  
T +31-23-5542770  
saleseuro@hikvision.com

**Hikvision France**  
T +33(0)1-85-330-444  
info.fr@hikvision.com

**Hikvision Oceania**  
T +61-2-8599-4233  
salesau@hikvision.com

**Hikvision Middle East**  
T +971-4-8816086  
salesme@hikvision.com

**Hikvision Spain**  
T +34-91-737-16-55  
info.es@hikvision.com

**Hikvision Hong Kong**  
T +852-2151-1761

**Hikvision Russia**  
T +7-495-669-67-99  
saleru@hikvision.com

**Hikvision Poland**  
T +48-22-460-01-50  
poland@hikvision.com

**Hikvision Canada**  
T +1-909-895-0400  
sales.usa@hikvision.com

**Hikvision India**  
T +91-22-28469900  
sales@pramahikvision.com

**Hikvision UK**  
T +44-1628-9021-4  
support.uk@hikvision.com