

PRODUCT TECHNICAL DATASHEET

EDGE1/BOX

Brushless



Intensive use




CODE	DESCRIPTION	PCS/PALLET
EDGE1/BOX	Digital control 36V for 2 BRUSHLESS motor, in plastic box. With 2-channel radio receiver installed on board.	50

PRODUCT TECHNICAL SPECIFICATIONS

Power line supply	230V AC - 50/60Hz
Stand-by consumption	0,5W
Operating temperature	-10+55 C°
Protection level	IP54
N. motors activated	2 Brushless motor
Max power per motor	250W
Max courtesy light charge	100W 230V AC - 40W 24V AC/DC
Max power gate open light	3W (24V DC)
Max voltage accessories output	20W (24V DC)
Electrical-Lock max power	15W (12V DC)
Flash light voltage	24V DC
Max flashing light charge	25W
Battery	Optional
Maximum dimension product in mm (L x W x H)	330 x 230 x 115
Product weight packed (Kg)	5,8
Number items per pallet/box	50

PRODUCT DIMENSIONS AND PREPARING FOR INSTALLATION

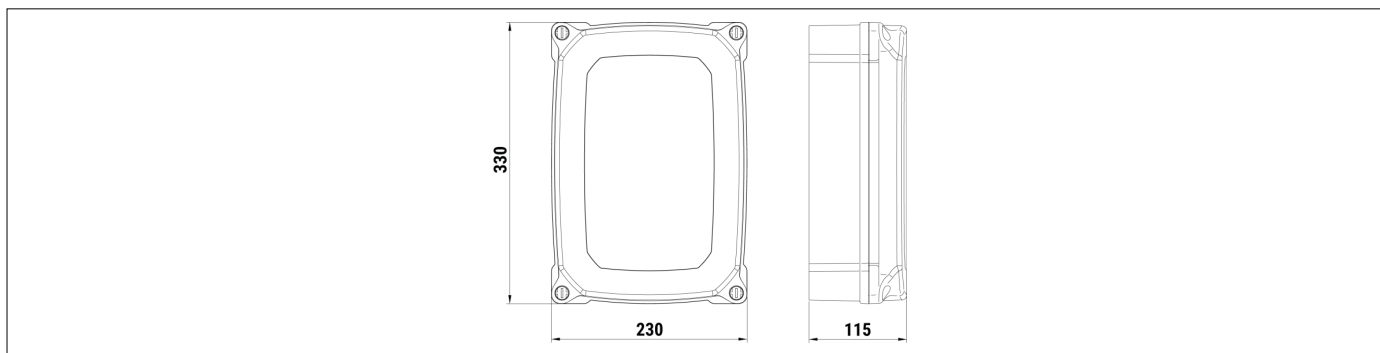

PRODUCT ACCESSORIES



B71/BCHP/EXT

Kit for emergency batteries
charger for Brushless digital
controller B70/1DCHP -
B70/1THP - EDGE1/BOX 36V
DC with plug-in card, with 2
recovery batteries 12V DC, 4.5
Ah. Box case included.



B71/BCHP/BOX

Kit for emergency batteries
charger for Brushless digital
controller B70/1DCHP -
B70/1THP - EDGE1/BOX 36V
DC. Box case included, without
recovery batteries.